



# TWO PARTS

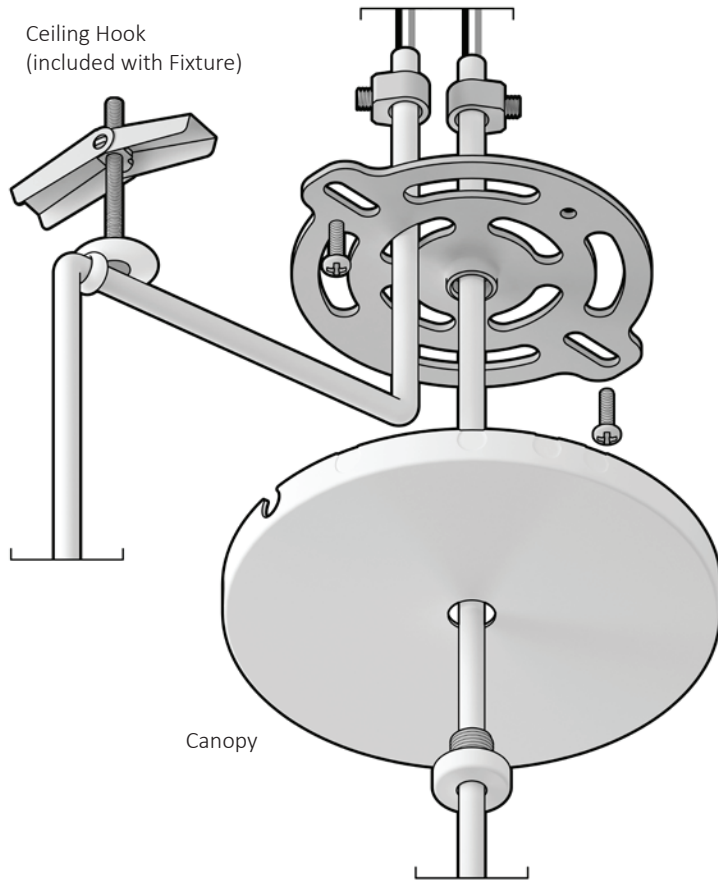

Center & Side Mounted

Side Mounted Only

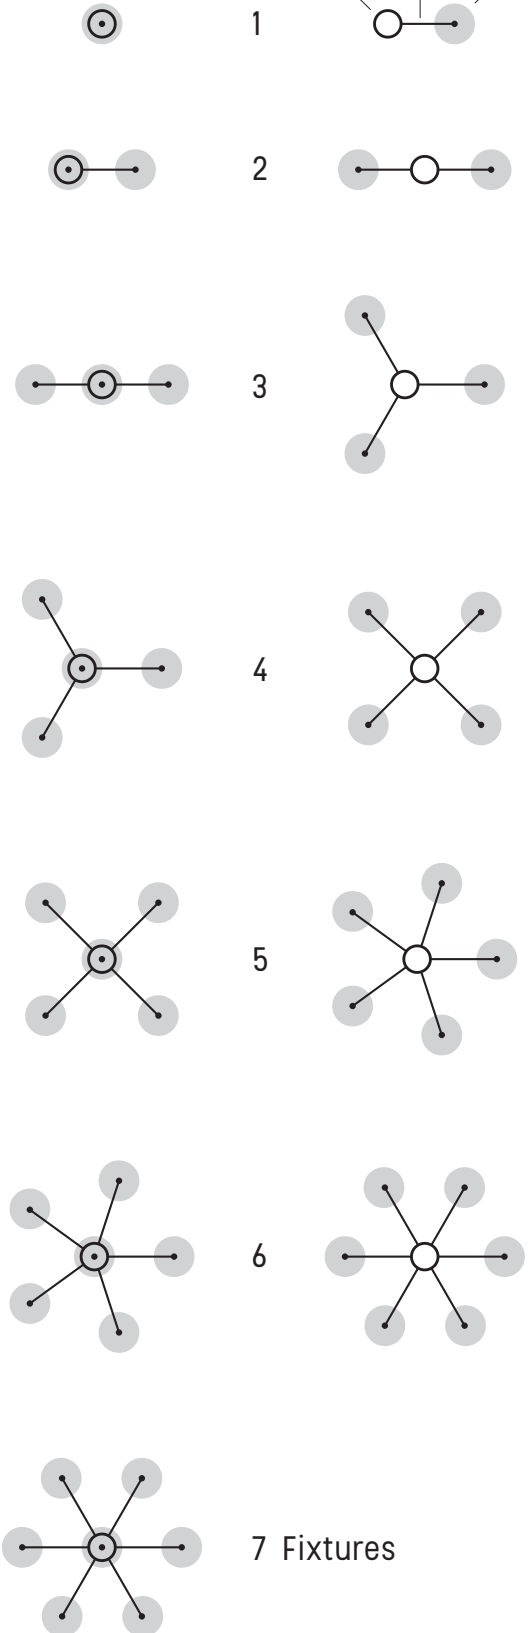

## Canopy01

By Christo Logan

**Part No**  
C01-W-7P

**Canopy**  
Fixtures Supported: 1- 7  
Material: Steel  
Color: White  
Dims:  $\varnothing 4 \frac{1}{2} \times H3/8$  in  
Dims:  $\varnothing 115 \times H9$  mm

**Features**  
Low Profile  
No exposed screws  
Side port knockouts  
Center port cap

**Ceiling Hook**  
Included with Fixture  
Screw size: #8 or M4 flathead  
Material: Steel  
Color: White  
Dims:  $\varnothing 0.8 \times H0.4$  in  
Dims:  $\varnothing 20 \times H11$  mm

**Certification**  
ETL Listed (UL & CSA Standards)  
Damp Location  
CE, RoHS

**Download CAD, Revit, IES**  
<http://two.parts/canopy01>

# TWO PARTS

Circuit Connector  
(customer provided)  
Must be UL/CSA/CE approved (US/Canada/  
Europe) for applicable wire gauge

LED Driver  
To be housed in accessible location  
as near as possible to Fixture.

Circuit Connector  
(customer provided)  
Must be UL/CSA/CE approved  
(US/Canada/Europe) for  
applicable wire gauge

Anchor  
Hole  $\varnothing$ : 9/16" or 15mm

Ceiling Hook  
Use #8 or M4 flathead  
screw located 1/2" or  
13mm shy of fixture  
location

Cord  
Side Mounted

Side Port Knockout

Building Wires  
(customer provided)

Internal Wires  
Black+ White-  
Multiple Fixtures to be wired  
in parallel to a single Driver

Cord Grip

Crossbar

Screw  
(customer provided)

Canopy

Center Port

Canopy Screw

Cord  
Center Mounted

## INSTALL GUIDE

All components are included  
unless otherwise noted.

### WARNING

Electric shock risk. Use caution  
when installing. Turn off  
electrical power at breaker  
before installation. Installation  
should be performed by a  
qualified electrician only.

The installer must ensure that  
the ceiling can support fixture's  
weight and reinforce ceiling  
structure by adequate means if  
necessary.

### MAINTENANCE

Wipe exposed surfaces with  
dry cloth as needed.

### INSTRUCTIONS

**1A Center Mount** Remove cap  
from Canopy Screw.

**1B Side Mount** Install Ceiling  
Hook(s) with loop facing away  
from canopy. Knock out side  
port(s) according to cluster  
configuration.

**2** Cut each Cord to desired  
length, leaving 3" (70mm) of  
exposed Internal Wires.

**3A Center Mount** Thread  
Cord through Canopy Screw,  
Canopy, Crossbar and Cord  
Grip.

**3B Side Mount** Thread Cord  
through Ceiling Hook, Crossbar  
and Cord Grip.

**4** Secure Cord Grip onto each  
Cord with 1/2" (10mm) of Cord  
left above.

**5** Using Circuit Connectors  
appropriate to local building  
code, connect Internal Wires  
to Driver and connect Driver to  
Building Wires.

**6** Screw Crossbar to ceiling or  
outlet box.

**7** Affix Canopy Screw to  
Crossbar with Canopy in  
between.