


# TWO PARTS

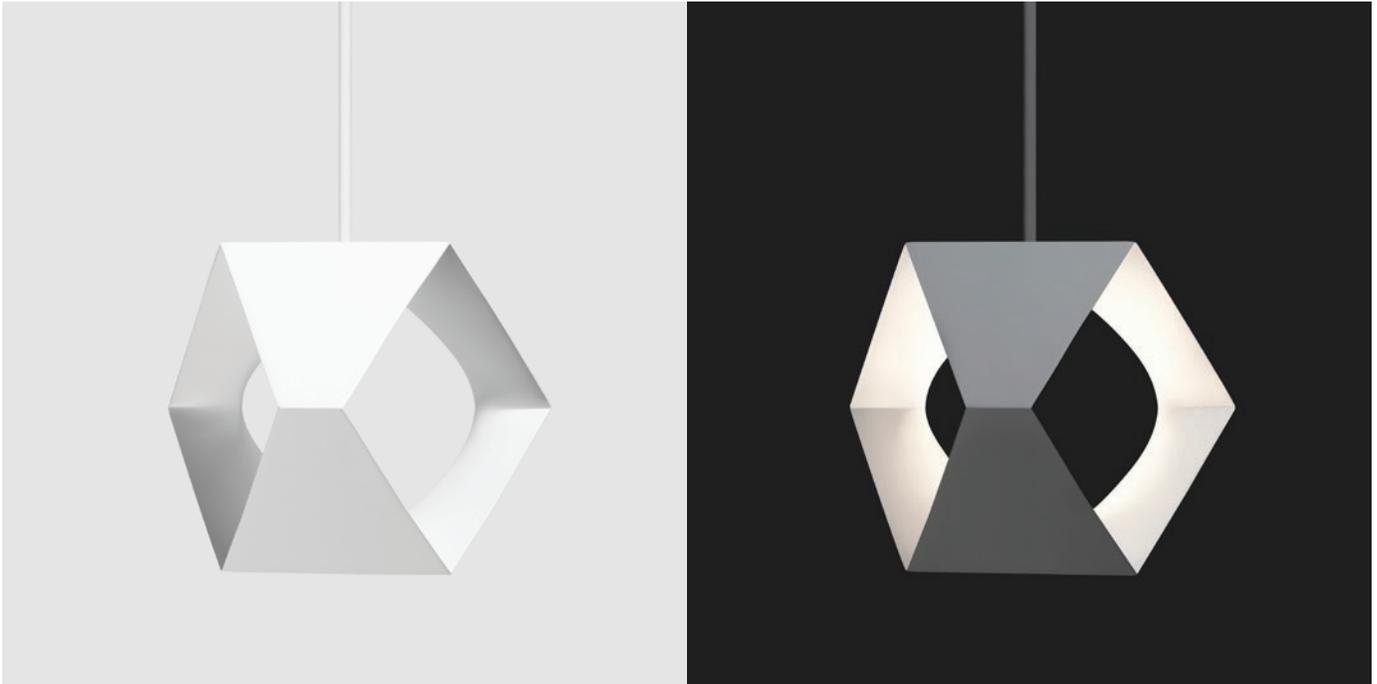

## Helium

By Christo Logan

### Description

Indoor Pendant Fixture

### Fixture

Material: Resin  
Color: Matte White  
Dims: 7.0 x 6.1 x 5.8 in  
Dims: 179 x 155 x 147 mm

### Cord

Color: White  
Length: 20 ft / 6 m

### Driver

Fits in most Junction Boxes  
Dimming: Triac, ELV, 0-10V  
Input Voltage: 100-305V AC

### LED

Input: 5.5W  
Output: 450 lm  
User replaceable: No  
Life Expectancy: 50,000 hours  
Color Accuracy: CRI 95+, R9 90+  
Input: 12V Constant Voltage

### Warranty

Fixture: 5 years  
Driver: 3 years

### Certification

ETL Listed (UL + CSA Standards)  
Damp Location  
CE, RoHS

### Download CAD, Revit, IES


<http://two.parts/helium>

### Light Temp


- HEL-WW-27 : 2700K
- HEL-WW-30 : 3000K
- HEL-WW-35 : 3500K

### Cluster Size + Driver

- 1 : 10W Driver
- 2 : 25W Driver
- 3 : 25W Driver
- 4 : 25W Driver
- 5 : 40W Driver
- 6 : 40W Driver
- 7 : 40W Driver

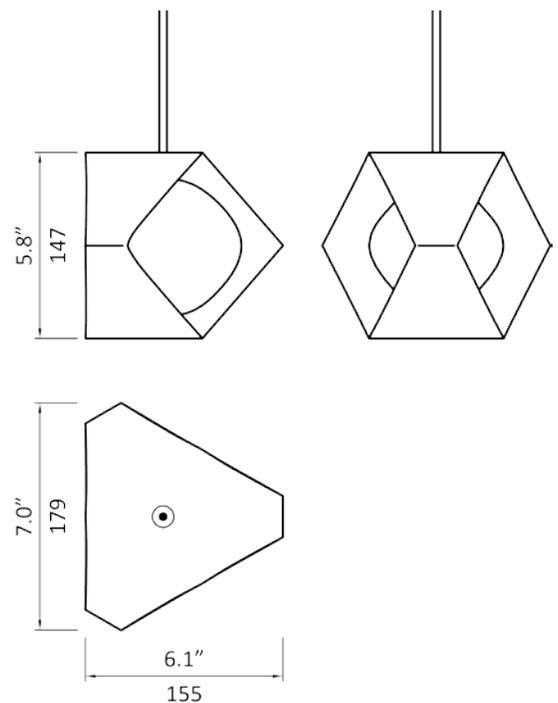

# TWO PARTS

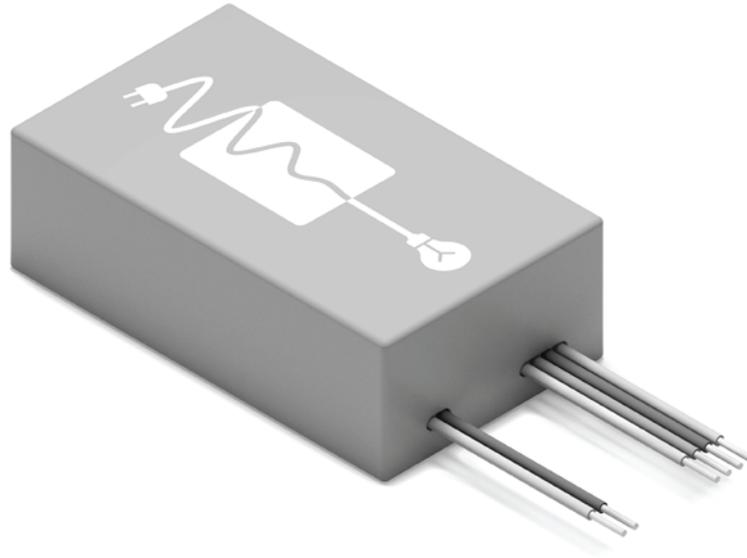

## Driver 10W

By LTF LLC

### Part No

D10W12V-UI-UD

### Description

Dimmable Low Voltage LED Driver

### Manufacturer Part

LTF DS10W12VMB1UD

### Features

Fits in most Junction Boxes  
Auto-reset, Short Circuit, Overload  
and Thermal Protection

### Warranty

3 year limited warranty

### Input

Voltage: 100-305V AC  
Frequency: 50/60Hz

### Output

Type: Constant Voltage  
Power: 10W  
Voltage: 12V DC  
Current: 833mA

### Specs



Dimming: Triac, ELV, 0-10V  
Class: Class 2 Power Supply  
IP Rating: IP67  
Humidity: 95% RH Max

### Certification


UL8750, UL1310  
CE, RoHS  
FCC Part 15 Class B Compliant

### Dimensions

2.7 x 1.6 x 0.9 in  
68 x 40 x 22 mm

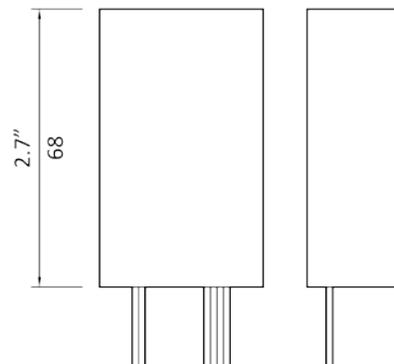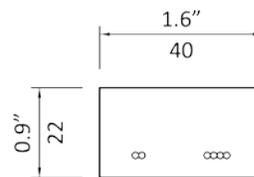

# TWO PARTS

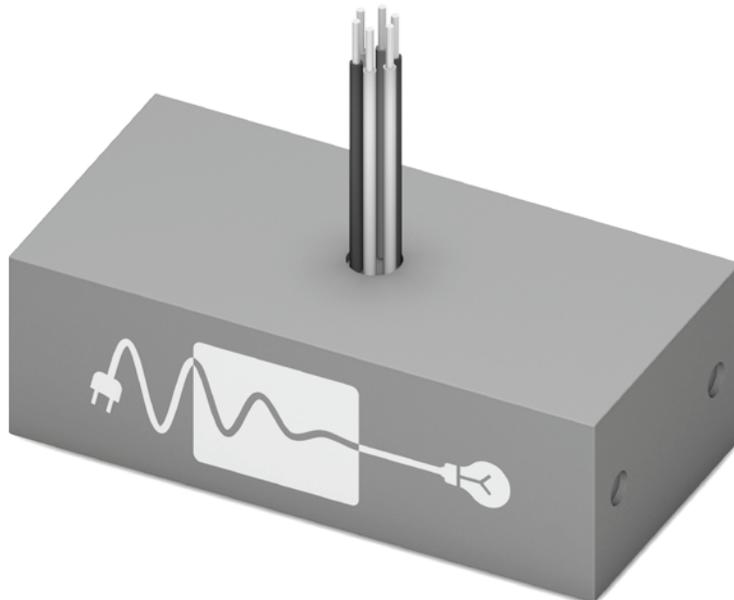

## Driver 25W

By LTF LLC

### Part No

D25W12V-UI-UD

### Description

Dimmable Low Voltage LED Driver

### Manufacturer Part

LTF DS25W12VBF1UD

### Features

Fits in most Junction Boxes  
Auto-reset, Short Circuit, Overload  
and Thermal Protection

### Warranty

3 year limited warranty

### Input

Voltage: 100-305V AC  
Frequency: 50/60Hz

### Output

Type: Constant Voltage  
Power: 25W  
Voltage: 12V DC  
Current: 2083mA

### Specs



Dimming: Triac, ELV, 0-10V  
Class: Class 2 Power Supply  
IP Rating: IP67  
Humidity: 95% RH Max

### Certification


UL8750, UL1310  
CE, RoHS  
FCC Part 15 Class B Compliant

### Dimensions

3.1 x 1.5 x 1.0 in  
78 x 38 x 26 mm

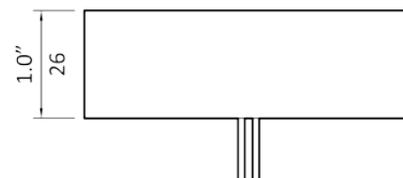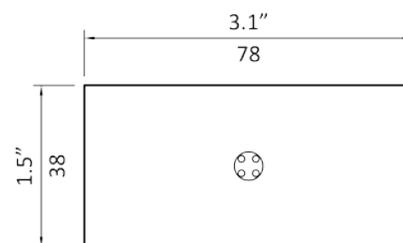

# TWO PARTS

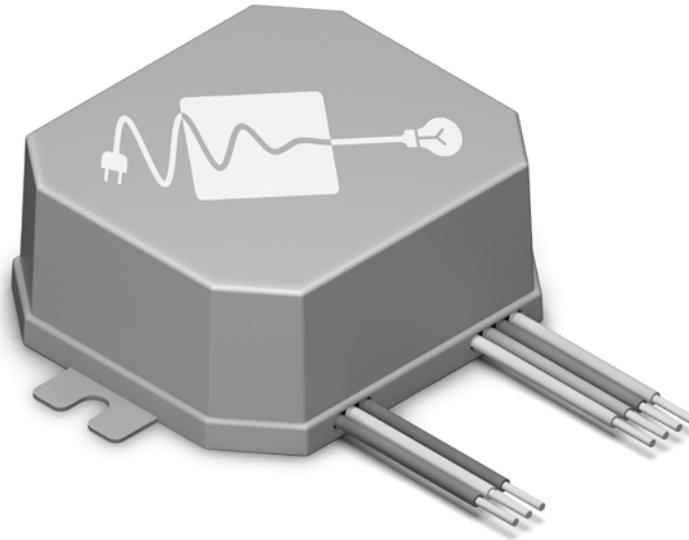

## Driver 40W

By LTF LLC

### Part No

D40W12V-UI-UD

### Description

Dimmable Low Voltage LED Driver

### Manufacturer Part

LTF DS40W12VOCUD

### Features

Fits in most Junction Boxes  
Auto-reset, Short Circuit, Overload  
and Thermal Protection

### Warranty

3 year limited warranty

### Input

Voltage: 100-305V AC  
Frequency: 50/60Hz

### Output

Type: Constant Voltage  
Power: 40W  
Voltage: 12V DC  
Current: 3333mA

### Specs



Dimming: Triac, ELV, 0-10V  
Class: Class 2 Power Supply  
IP Rating: IP67  
Humidity: 95% RH Max

### Certification


UL8750, UL1310  
CE, RoHS  
FCC Part 15 Class B Compliant

### Dimensions

3.5 x 2.5 x 1.2 in  
90 x 63 x 30 mm

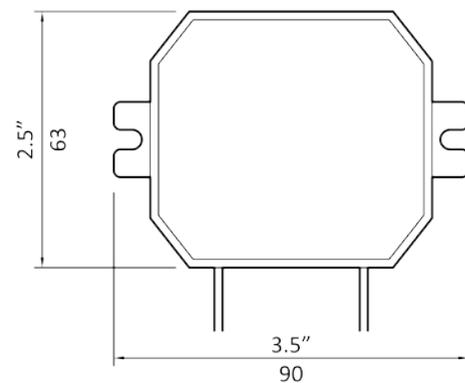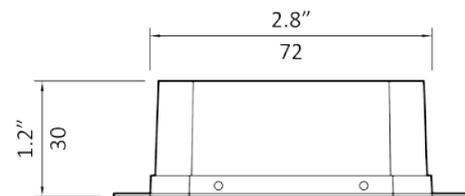

# TWO PARTS

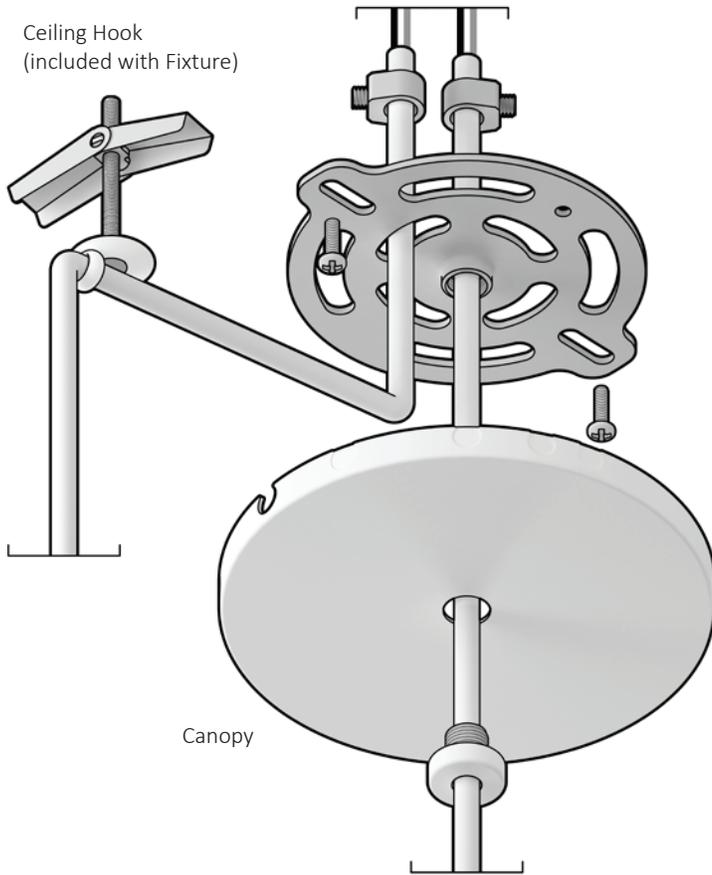

## Canopy01

By Christo Logan

### Part No

C01-W-7P

### Canopy

Fixtures Supported: 1- 7

Material: Steel

Color: White

Dims:  $\varnothing 4 \frac{1}{2} \times H3/8$  in

Dims:  $\varnothing 115 \times H9$  mm

### Features

Low Profile

No exposed screws

Side port knockouts

Center port cap

### Ceiling Hook

Included with Fixture

Screw size: #8 or M4 flathead

Material: Steel

Color: White

Dims:  $\varnothing 0.8 \times H0.4$  in

Dims:  $\varnothing 20 \times H11$  mm

### Certification

ETL Listed (UL & CSA Standards)

Damp Location

CE, RoHS

### Download CAD, Revit, IES

<http://two.parts/canopy01>

### Center & Side Mounted




1




2




3




4



5








6



7 Fixtures

### Side Mounted Only



# TWO PARTS

**Circuit Connector** (customer provided)  
Must be UL/CSA/CE approved (US/Canada/Europe) for applicable wire gauge

**LED Driver**  
To be housed in accessible location as near as possible to Fixture.

**Circuit Connector** (customer provided)  
Must be UL/CSA/CE approved (US/Canada/Europe) for applicable wire gauge

**Anchor**  
Hole  $\varnothing$ : 9/16" or 15mm

**Ceiling Hook**  
Use #8 or M4 flathead screw located 1/2" or 13mm shy of fixture location

**Cord**  
Side Mounted

**Side Port Knockout**

**Building Wires** (customer provided)

**Internal Wires** Black+ White-  
Multiple Fixtures to be wired in parallel to a single Driver

**Cord Grip**

**Crossbar**

**Screw** (customer provided)

**Canopy**

**Center Port**

**Canopy Screw**

**Cord**  
Center Mounted

## INSTALL GUIDE

All components are included unless otherwise noted.

### WARNING

Electric shock risk. Use caution when installing. Turn off electrical power at breaker before installation. Installation should be performed by a qualified electrician only.

The installer must ensure that the ceiling can support fixture's weight and reinforce ceiling structure by adequate means if necessary.

### MAINTENANCE

Wipe exposed surfaces with dry cloth as needed.

### INSTRUCTIONS

**1A Center Mount** Remove cap from Canopy Screw.

**1B Side Mount** Install Ceiling Hook(s) with loop facing away from canopy. Knock out side port(s) according to cluster configuration.

**2** Cut each Cord to desired length, leaving 3" (70mm) of exposed Internal Wires.

**3A Center Mount** Thread Cord through Canopy Screw, Canopy, Crossbar and Cord Grip.

**3B Side Mount** Thread Cord through Ceiling Hook, Crossbar and Cord Grip.

**4** Secure Cord Grip onto each Cord with 1/2" (10mm) of Cord left above.

**5** Using Circuit Connectors appropriate to local building code, connect Internal Wires to Driver and connect Driver to Building Wires.

**6** Screw Crossbar to ceiling or outlet box.

**7** Affix Canopy Screw to Crossbar with Canopy in between.