


# TWO PARTS

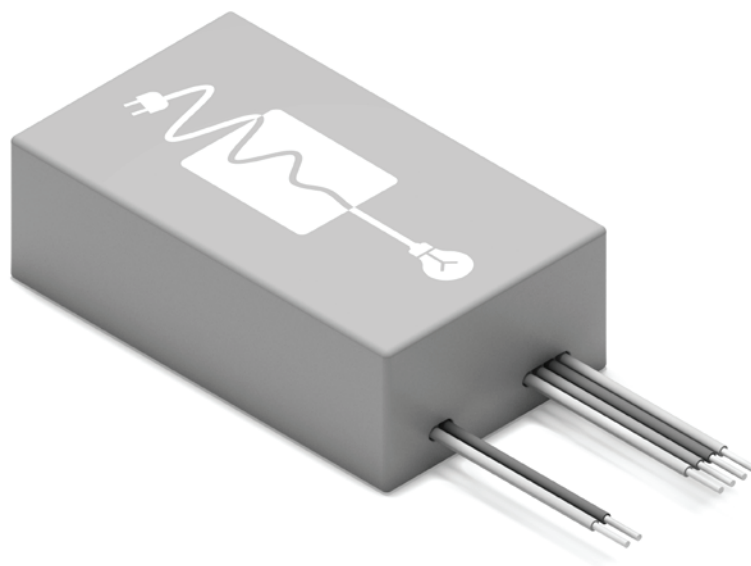

## Driver 10W

By LTF LLC

### Part No

D10W12V-UI-UD

### Description

Dimmable Low Voltage LED Driver

### Manufacturer Part

LTF DS10W12VMB1UD

### Features

Fits in most Junction Boxes  
Auto-reset, Short Circuit, Overload  
and Thermal Protection

### Warranty

3 year limited warranty

### Input

Voltage: 100-305V AC  
Frequency: 50/60Hz

### Output

Type: Constant Voltage  
Power: 10W  
Voltage: 12V DC  
Current: 833mA

### Specs



Dimming: Triac, ELV, 0-10V  
Class: Class 2 Power Supply  
IP Rating: IP67  
Humidity: 95% RH Max

### Certification


UL8750, UL1310  
CE, RoHS  
FCC Part 15 Class B Compliant

### Dimensions

2.7 x 1.6 x 0.9 in  
68 x 40 x 22 mm

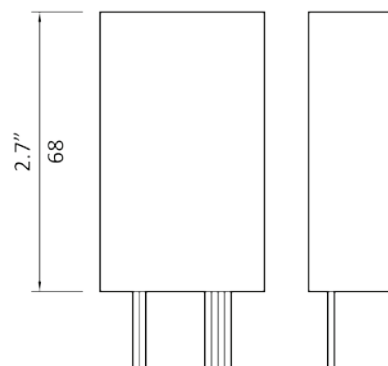

# TWO PARTS

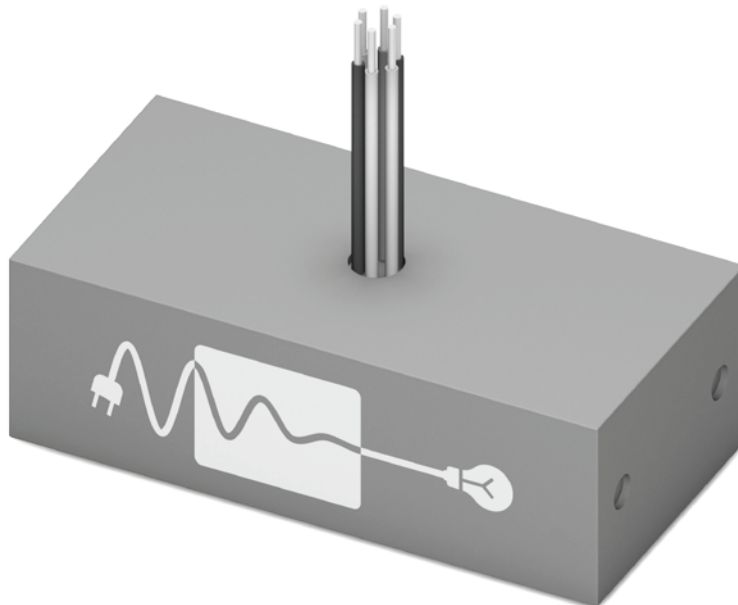

## Driver 25W

By LTF LLC

### Part No

D25W12V-UI-UD

### Description

Dimmable Low Voltage LED Driver

### Manufacturer Part

LTF DS25W12VBF1UD

### Features

Fits in most Junction Boxes  
Auto-reset, Short Circuit, Overload  
and Thermal Protection

### Warranty

3 year limited warranty

### Input

Voltage: 100-305V AC  
Frequency: 50/60Hz

### Output

Type: Constant Voltage  
Power: 25W  
Voltage: 12V DC  
Current: 2083mA

### Specs



Dimming: Triac, ELV, 0-10V  
Class: Class 2 Power Supply  
IP Rating: IP67  
Humidity: 95% RH Max

### Certification


UL8750, UL1310  
CE, RoHS  
FCC Part 15 Class B Compliant

### Dimensions

3.1 x 1.5 x 1.0 in  
78 x 38 x 26 mm

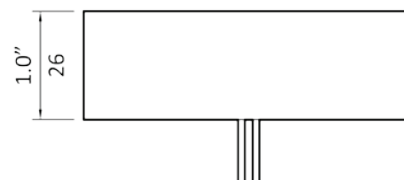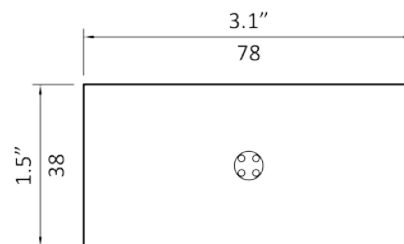

# TWO PARTS

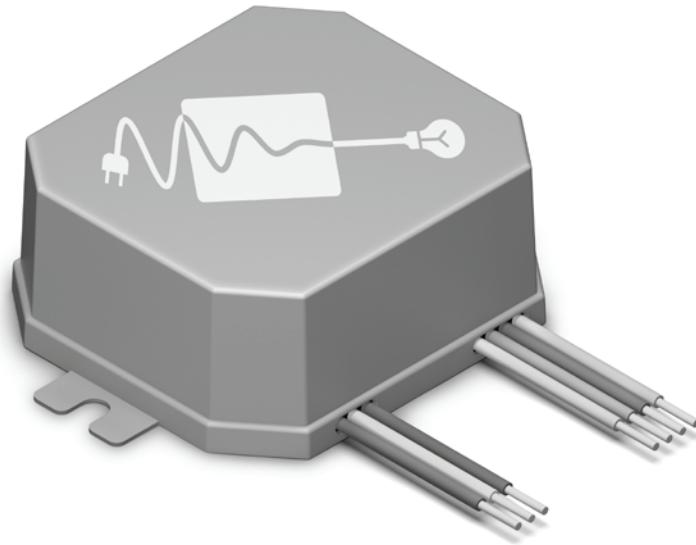

## Driver 40W

By LTF LLC

### Part No

D40W12V-UI-UD

### Description

Dimmable Low Voltage LED Driver

### Manufacturer Part

LTF DS40W12VOCUD

### Features

Fits in most Junction Boxes  
Auto-reset, Short Circuit, Overload  
and Thermal Protection

### Warranty

3 year limited warranty

### Input

Voltage: 100-305V AC  
Frequency: 50/60Hz

### Output

Type: Constant Voltage  
Power: 40W  
Voltage: 12V DC  
Current: 3333mA

### Specs

Dimming: Triac, ELV, 0-10V  
Class: Class 2 Power Supply  
IP Rating: IP67  
Humidity: 95% RH Max

### Certification

UL8750, UL1310  
CE, RoHS  
FCC Part 15 Class B Compliant

### Dimensions

3.5 x 2.5 x 1.2 in  
90 x 63 x 30 mm

