


TWO PARTS

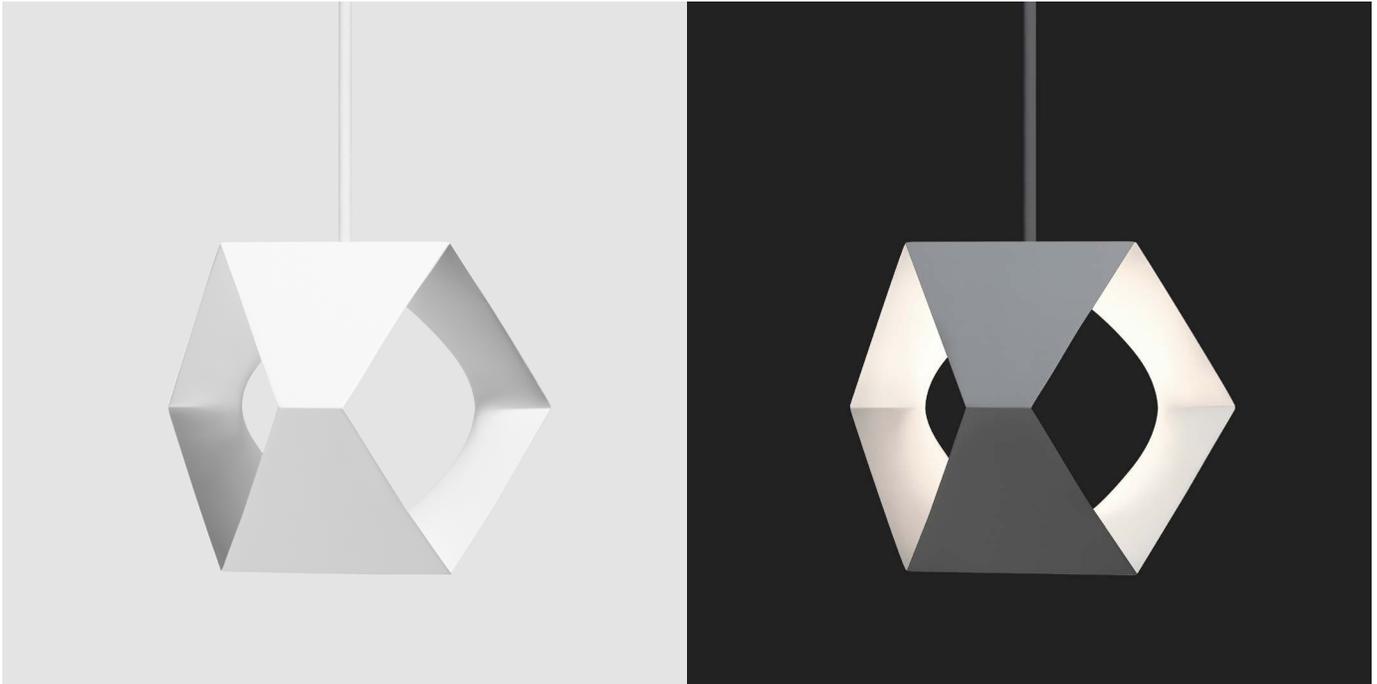

Helium

By Christo Logan

Description

Indoor Pendant Fixture

Fixture

Material: Resin
Color: Matte White
Dims: 7.0 x 6.1 x 5.8 in
Dims: 179 x 155 x 147 mm

Cord

Color: White
Length: 20 ft / 6 m

Driver

Fits in most Junction Boxes
Dimming: Triac, ELV, 0-10V
Input Voltage: 100-305V AC

LED

Input: 5.5W
Output: 400 lm
User replaceable: No
Life Expectancy: 50,000 hours
Color Accuracy: CRI 95+, R9 90+
Input: 12V Constant Voltage

Warranty

Fixture: 5 years
Driver: 3 years

Certification

ETL Listed (UL + CSA Standards)
Damp Location
CE, RoHS

Download CAD, Revit, IES


<http://two.parts/helium>

Light Temp


- ☐ HEL-WW-27 : 2700K
- ☐ HEL-WW-30 : 3000K
- ☐ HEL-WW-35 : 3500K

Cluster Size : Driver

- ☐ 1 : Two Parts 10W Driver
- ☐ 2 : Two Parts 25W Driver
- ☐ 3 : Two Parts 25W Driver
- ☐ 4 : Two Parts 25W Driver
- ☐ 5 : Two Parts 40W Driver
- ☐ 6 : Two Parts 40W Driver
- ☐ 7 : Two Parts 40W Driver

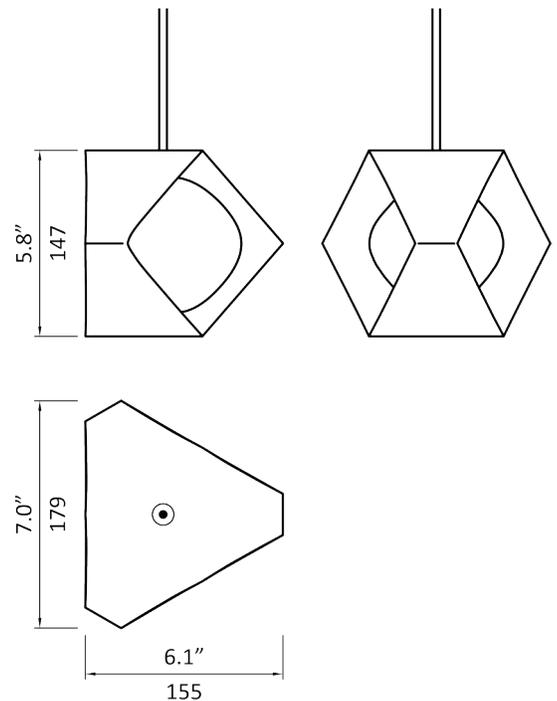

TWO PARTS

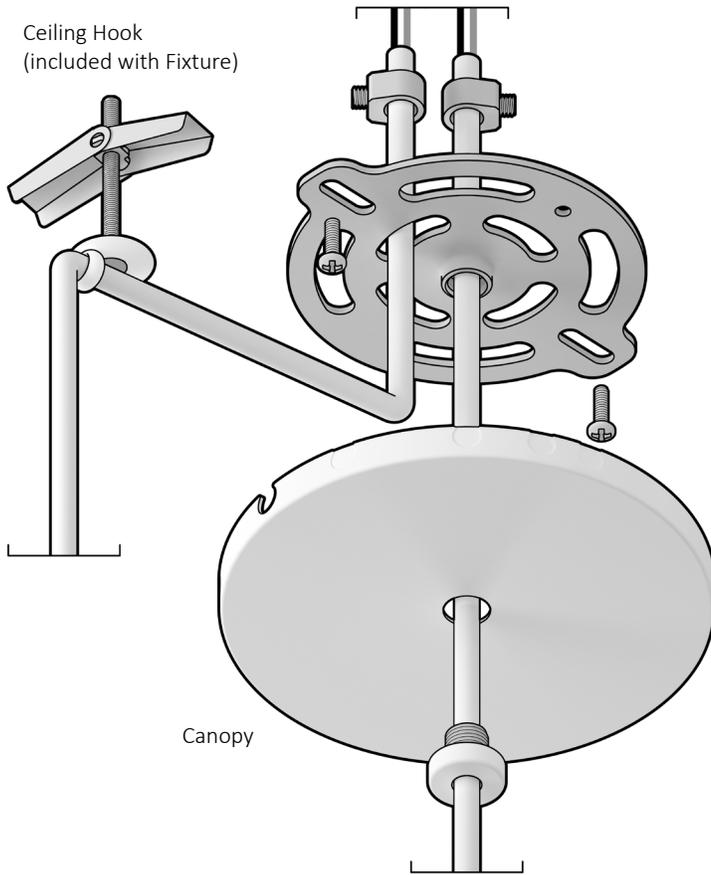

Ceiling Hook
(included with Fixture)

Canopy

Canopy01

By Christo Logan

Part No

C01-W-7P

Canopy

Fixtures Supported: 1- 7

Material: Steel

Color: White

Dims: $\varnothing 4 \frac{1}{2} \times H3/8$ in

Dims: $\varnothing 115 \times H9$ mm

Features

Low Profile

No exposed screws

Side port knockouts

Center port cap

Ceiling Hook

Included with Fixture

Screw size: #8 or M4 flathead

Material: Steel

Color: White

Dims: $\varnothing 0.8 \times H0.4$ in

Dims: $\varnothing 20 \times H11$ mm

Certification

ETL Listed (UL & CSA Standards)

Damp Location

CE, RoHS

Download CAD, Revit, IES


<http://two.parts/canopy01>

Center & Side
Mounted


Side Mounted
Only





1





2





3





4



5



6



7 Fixtures

TWO PARTS

Circuit Connector (customer provided)
Must be UL/CSA/CE approved (US/Canada/Europe) for applicable wire gauge

LED Driver
To be housed in accessible location as near as possible to Fixture.

Circuit Connector (customer provided)
Must be UL/CSA/CE approved (US/Canada/Europe) for applicable wire gauge

Anchor
Hole \varnothing : 9/16" or 15mm

Ceiling Hook
Use #8 or M4 flathead screw located 1/2" or 13mm shy of fixture location

Cord
Side Mounted

Side Port Knockout

Building Wires (customer provided)

Internal Wires Black+ White- Multiple Fixtures to be wired in parallel to a single Driver

Cord Grip
Tighten screw to ensure cord cannot move

Ground Screw
Tighten around Ground Wire

Screw (customer provided)

Canopy

Center Port

Canopy Screw

Cord
Center Mounted

INSTALL GUIDE

All components are included unless otherwise noted.

WARNING

Electric shock risk. Use caution when installing. Turn off electrical power at breaker before installation. Installation should be performed by a qualified electrician only.

The installer must ensure that the ceiling can support fixture's weight and reinforce ceiling structure by adequate means if necessary.

MAINTENANCE

Wipe exposed surfaces with dry cloth as needed.

INSTRUCTIONS

1A Center Mount Remove cap from Canopy Screw.

1B Side Mount Install Ceiling Hook(s) with loop facing away from canopy. Knock out side port(s) according to cluster configuration.

2 Cut each Cord to desired length, leaving 3" (70mm) of exposed Internal Wires.

3A Center Mount Thread Cord through Canopy Screw, Canopy, Crossbar and Cord Grip.

3B Side Mount Thread Cord through Ceiling Hook, Crossbar and Cord Grip.


4 Secure Cord Grip onto each Cord with 1/2" (10mm) of Cord left above.

5 Using Circuit Connectors appropriate to local building code, connect Internal Wires to Driver and connect Driver to Building Wires.

6 Screw Crossbar to ceiling or outlet box.

7 Affix Canopy Screw to Crossbar with Canopy in between.

TWO PARTS

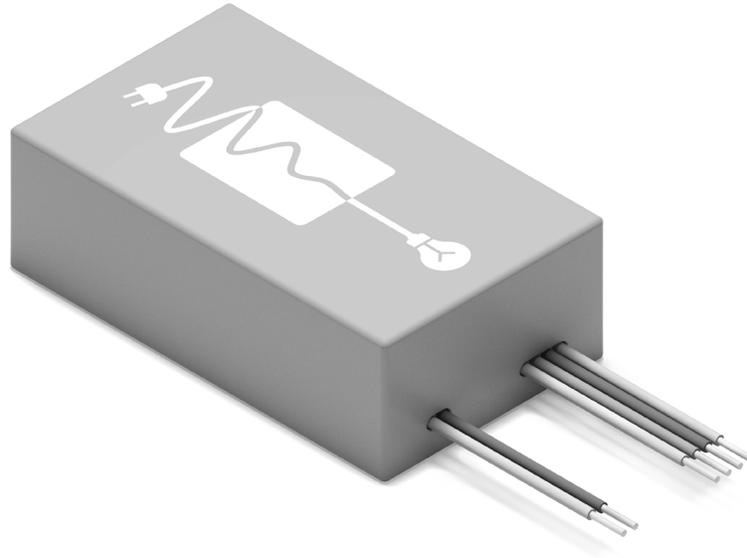

Driver 10W

By LTF LLC

Part No

D10W12V-UI-UD

Description

Dimmable Low Voltage LED Driver

Manufacturer Part

LTF DS10W12VMB1UD

Features

Fits in most Junction Boxes
Auto-reset, Short Circuit, Overload
and Thermal Protection

Warranty

3 year limited warranty

Input

Voltage: 100-305V AC
Frequency: 50/60Hz

Output

Type: Constant Voltage
Power: 10W
Voltage: 12V DC
Current: 833mA

Specs



Dimming: Triac, ELV, 0-10V
Class: Class 2 Power Supply
IP Rating: IP67
Humidity: 95% RH Max

Certification


UL8750, UL1310
CE, RoHS
FCC Part 15 Class B Compliant

Dimensions

2.7 x 1.6 x 0.9 in
68 x 40 x 22 mm

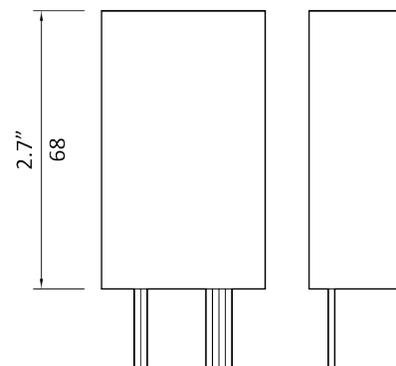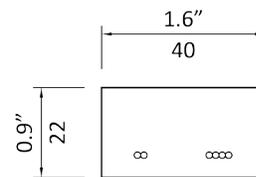

TWO PARTS

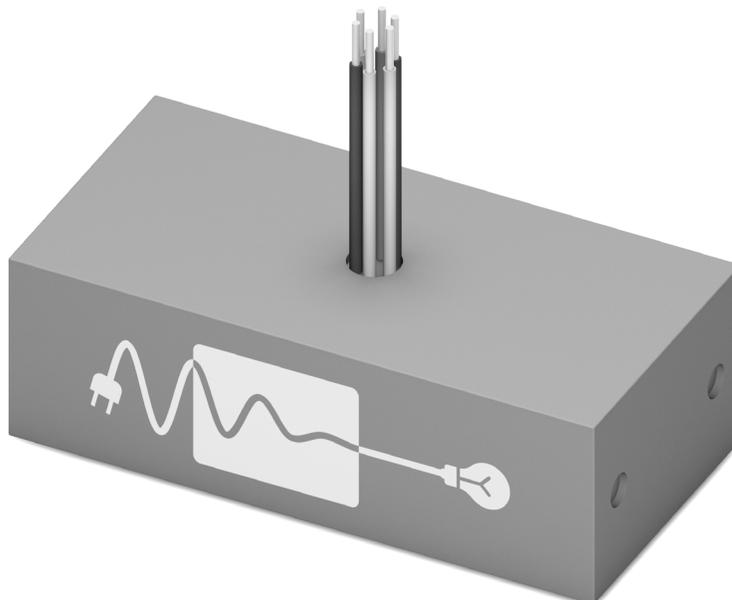

Driver 25W

By LTF LLC

Part No

D25W12V-UI-UD

Description

Dimmable Low Voltage LED Driver

Manufacturer Part

LTF DS25W12VBF1UD

Features

Fits in most Junction Boxes
Auto-reset, Short Circuit, Overload
and Thermal Protection

Warranty

3 year limited warranty

Input

Voltage: 100-305V AC
Frequency: 50/60Hz

Output

Type: Constant Voltage
Power: 25W
Voltage: 12V DC
Current: 2083mA

Specs



Dimming: Triac, ELV, 0-10V
Class: Class 2 Power Supply
IP Rating: IP67
Humidity: 95% RH Max

Certification


UL8750, UL1310
CE, RoHS
FCC Part 15 Class B Compliant

Dimensions

3.1 x 1.5 x 1.0 in
78 x 38 x 26 mm

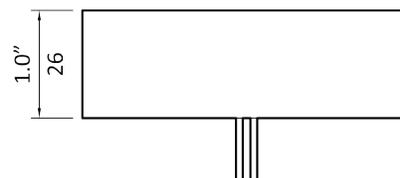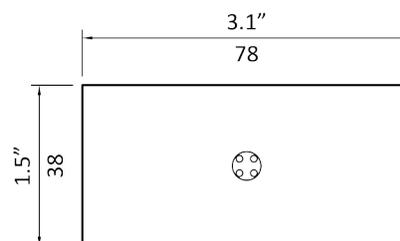

TWO PARTS

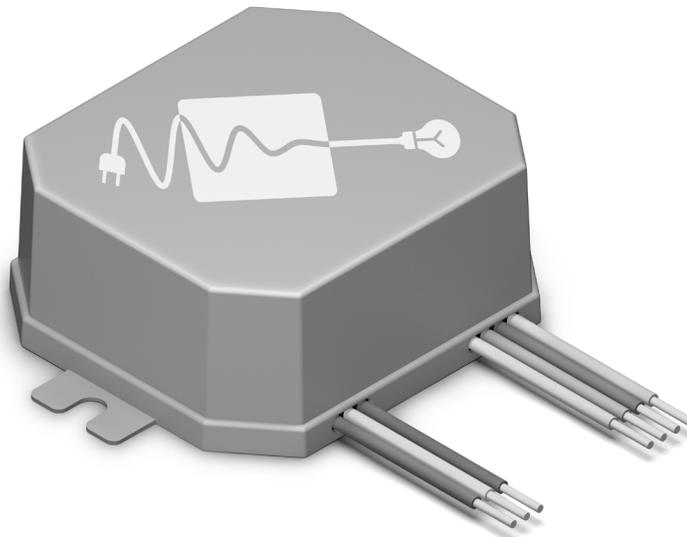

Driver 40W

By LTF LLC

Part No

D40W12V-UI-UD

Description

Dimmable Low Voltage LED Driver

Manufacturer Part

LTF DS40W12VOCUD

Features

Fits in most Junction Boxes
Auto-reset, Short Circuit, Overload
and Thermal Protection

Warranty

3 year limited warranty

Input

Voltage: 100-305V AC
Frequency: 50/60Hz

Output

Type: Constant Voltage
Power: 40W
Voltage: 12V DC
Current: 3333mA

Specs



Dimming: Triac, ELV, 0-10V
Class: Class 2 Power Supply
IP Rating: IP67
Humidity: 95% RH Max

Certification

UL8750, UL1310
CE, RoHS
FCC Part 15 Class B Compliant

Dimensions

3.5 x 2.5 x 1.2 in
90 x 63 x 30 mm

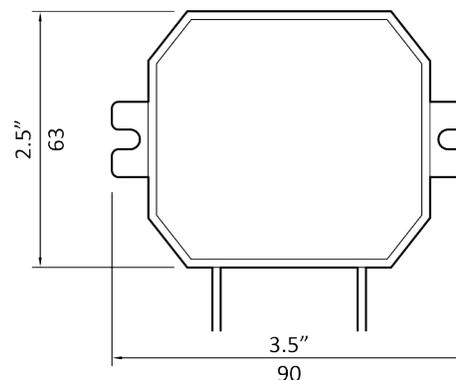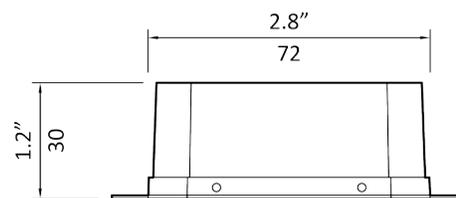

LTF Drivers Dimmer Compatibility List

Dimmer brand: Lutron, Crestron, Leviton

1	Lutron DIVA CL	DVCL-153P-WH
2	Lutron DIVA ELV	DVELV-303P
3	Lutron Home Works	HQRD-6A
4	Lutron Home Works	HQRD-6NA
5	Leviton	Model 6615
6	Leviton	Model 6672
7	Leviton	Model 6674/IPL06
8	Leviton	Model IPE04
9	Leviton	Model IPI06
10	Leviton	Model VP106
11	Leviton	Model VPE04
12	Leviton	VPM06
13	Leviton	VRE04
14	Leviton	Model VRM10
15	Lutron MAESTRO	MRF2-6ELV-120-WH
16	Lutron NOVA T	NTELV-600-WH
17	Lutron NOVA	NVELV-600-WH
18	Lutron SKYLARK	SELV-600-WH
19	Lutron	MRF2-6ELV-120-WH
20	Lutron Vierti	VTELV-600-XXX
21	Lutron NOVA T	NTELV-300
22	Lutron MAESTRO	MAELV-600
23	Lutron MAESTRO	MSCELV-600M
24	Lutron MAESTRO IR	MIRELV-600
25	Lutron MAESTRO WIRELESS	MRF2-6ELV-120

26	Lutron CASETA WIRELESS	PD-6WCL
27	Lutron MAESTRO RF	RRA-6D
28	Lutron MAESTRO RF	RRA-6NA
29	Lutron MAESTRO RF	RRA-6ND
30	Skylark Contour	CTELV-303P
31	CRESTON	SELV-300P
32	CRESTON	CLS-C6
33	CRESTON	CLS-C6M
34	CRESTON	CLS-C6EX
35	CRESTON	CLS-C6MEX
36	CRESTON	CLS-C6MRF
37	CRESTON	CLS-C6RF
38	CRESTON	CLS-EXP-DIM
39	CRESTON	CLS-EXP-DIMU
40	CRESTON	CLX-1DIM4
41	CRESTON	CLX-1DIM8
42	CRESTON	CLX-2DIM2
43	CRESTON	CLX-2DIM8
44	CRESTON	CLX-1DELV4
45	CRESTON	DIN-1DIM4
46	CRESTON	DIN-1DIMU4
47	CRESTON	CLW-DIMEX-E
48	CRESTON	CLW-DIMEX-P
49	CRESTON	CLW-DIMSWEX-E
50	CRESTON	CLW-DIMSWEX-P

51	CRESTON	P-DIMEX
52	CRESTON	GLX-DIM6
53	CRESTON	GLXX-2DIM8
54	CRESTON	CLW-DELVEX-E
55	CRESTON	CLW-DELVEX-P
56	Lutron Diva	0-10V DVSTV
57	Lutron Diva	0-10V DVTV
58	Leviton	IP710
59	Leviton	DS710
60	Leviton	DD710
61	Crestron	CLX-2DIMFLV8
62	Crestron	DIN-4DIMFLV4
63	Crestron	CLS-EXP-DIMFLV
64	Crestron	GLX-DIMFLV8

* These are a few examples of dimmers tested for compatability.
There are many other dimmers that are compatable on the market.